



POWFR

Standby (kVA) 64 kVA

Continuous (kVA) 58 kVA

50 / 60Hz available 50 Hz

WEIGHT

Dry (kg)

1,500 kg

Weight (kg)

1,800 kg

OPERATIONAL HOURS

MOTORS

Engine Model KDI3404TCR

Engine Manufacturer Kohler

Noise at 7 metres 65 dB

Alternator Manufacturer Leroy Sommer

FLUIDS FLUID CAPACITIES

Fuel (Litres) 275 Litres

AdBlue (Litre) Litres

FLUID CONSUMPTION Fuel Consumption at

10.8 l/h

Running on internal 70% 50Hz day tank at 70% 25 hrs

AdBlue per hour at 70% (litre) N/A I/h

ELECTRICAL CONNECTION

Outgoing Electrical Connections 1 x 63A 3Φ 1 x 32A 30

1 x 32A 1Φ

0333 034 9433 ALWAYS **U**N

60kVA **Stage V Generator**

Power Capacity 53 kw

Fuel Consumption at 70% 50Hz 10.8 l/h

Weight 1,500 kg

Dimensions (LxWxH) 2.55 × 1.13 × 1.64 m 50 / 60Hz available 50 Hz

Running on internal day tank at 70% 25 hrs

Noise at 7 metres 65 dB

CAPABILITY:

Compliant Stage V engine technology

- Synchronisation & Load on Demand capable
- Remote monitoring enabled
- Hot dipped galvanised powder coated canopy
- Road towable
- Central lifting point
- Forklift pockets •
- Fully bunded (all liquids) •
- Bund alarm to avoid any external leaks •
- 3-way fuel valve for external fuel tank connection


CONTROL & ELECTRICAL/MECHANICAL PROTECTION:

- DeepSea 8610 MKII generator controller
- Motorised 4 pole circuit breaker with earth • leakage protection
- · Hardwire with microswitch protection over busbar door
- Battery isolator
- Emergency Stop
- · Engine safety protection shutdown alarm
- DPF filter complete with LED status display

DIMENSIONS

Dimensions (LxWxH) 2.55 × 1.13 × 1.64 m

60KVA - STAGE V GENERATOR

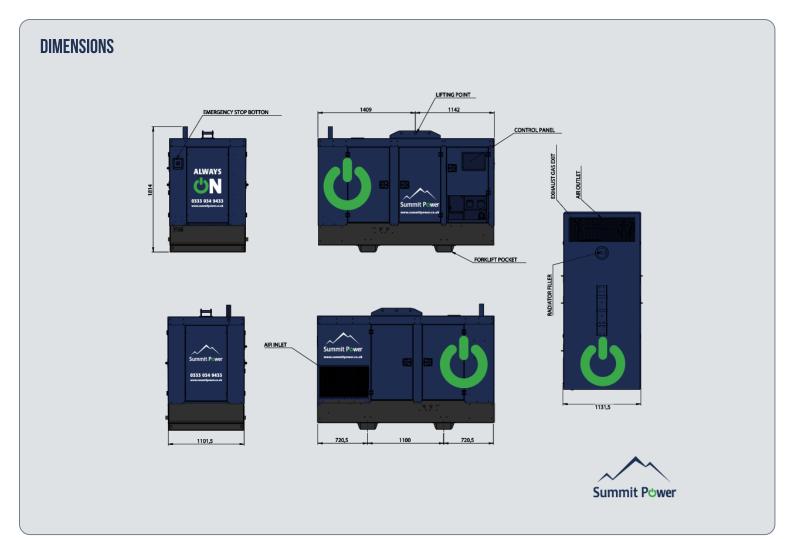

COMPREHENSIVE POWER SOLUTIONS ACROSS THE UK



